

# TCAS I S72-1746



## DESCRIPTION


**S72-1746:** Traffic Collision Avoidance Systems (TCAS I) antenna. It is a low-profile antenna with a teardrop radome and leading edge shield. The antenna is DC grounded and provides lightning strike protection. It features a directional four element array. This antenna is suitable for general aviation aircrafts and available with L3's "Skywatch" systems.

**Color Options:** White with red silkscreen  
Black with blue silkscreen

**FEDERAL & MILITARY SPECS:** FAA TSO C118, DO-160C, DO-197 and MIL-STD-454.

## SPECIFICATIONS

ELECTRICAL	
Frequency	1030 ± 1 MHz 1090 ± 3 MHz
VSWR	2.0:1 (1030 ± 1 MHz) 2.3:1 (1090 ± 3 MHz)
Gain	Delta Port: 2.5 dBi min @ 1030 MHz 2.0 dBi min @ 1090 MHz Sigma Port: 1.0 dBi min @ 1030 MHz 1.5 dBi min @ 1090 MHz
Polarization	Vertical
Impedance	50 Ω
Power	Delta/Sigma Port: 1000 Watts Peak @ 1% Duty Cycle, Transmit/Receive Probe Port: 10 Watts Max
Isolation	-20 dB min
Probe Coupling	Delta Port: -35 ± 4 dB @ 1030 MHz -34 ± 4 dB @ 1090 MHz Sigma Port: -26 ± 2 dB @ 1090 MHz
Bearing Error	± 9°
MECHANICAL	
Weight	2.3 lbs
Height	1.30 in.
Length	11.00 in.
Width	6.25 in.
Material	6061-T6 Aluminum/Thermoset Plastic
Finish	Skydrol Resistant Polyurethane Enamel
Connector	Delta & Sigma Port: TNC Female Probe Port: BNC Female
ENVIRONMENTAL	
Temperature	-55°C (-67°F) to +70°C (+158°F)
Altitude	55,000 ft
Vibration	± 10 G's
Shock	30 G's

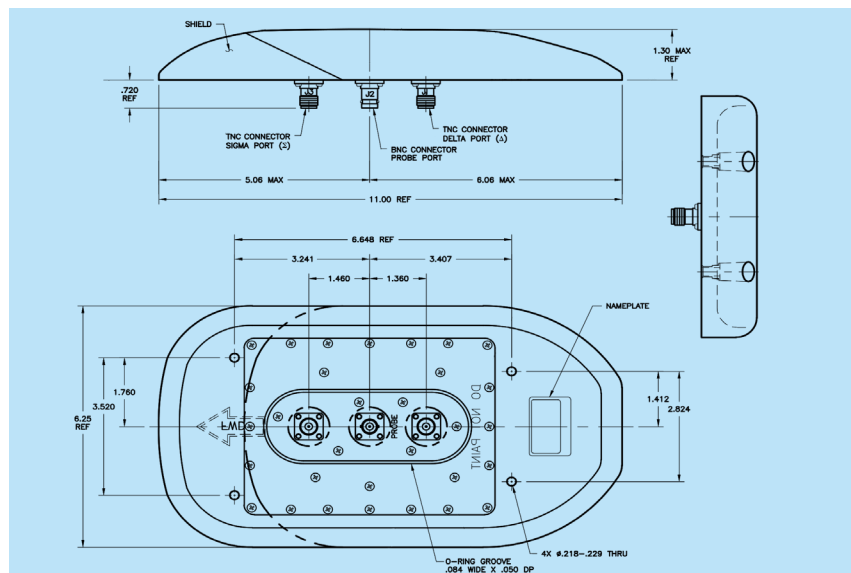

8929 Fullbright Ave., Chatsworth, CA, 91311 • Ph: 818-341-5366 • Fax: 818-341-9059  
Email: [productinfo@sensorantennas.com](mailto:productinfo@sensorantennas.com) • [www.sensorantennas.com](http://www.sensorantennas.com)