

4000W AC-to-AC Frequency Converters

TFC4000 Series

Manufactured by Mid-Continent Instrument Co., Inc.

Quiet the cabin and cut replacement costs with the quietest and most reliable 3-phase frequency converters on the market. The TFC4000 Series AC-to-AC Frequency Converters are the lightest in their power class and easier to install in tight, hard-to-reach spaces.



The QUIETEST

The LIGHTEST

The MOST RELIABLE

FAA, EASA, and ANAC STC approved for Gulfstream GIV-X, GV-SP, and GVI

Product features

OUTPUT POWER 4,000 Watts
INPUT VOLTAGE 115/200 VAC 360 – 800 Hz 3-phase

OUTPUT VOLTAGE TFC4000 115 VAC, 60 Hz, single phase TFC4002 230 VAC, 50 Hz, single phase

EFFICIENCY 93%

OUTPUT WAVEFORM Single phase, pure sine wave < 3% total harmonic distortion

POWER FACTOR -0.8 to +0.8

WEIGHT 18.9 lbs (8.57 kg)

REMOTE ON/OFF Yes

PROTECTION Short circuit, under-voltage, over-voltage,

overload (up to 150% for 5 minutes,


without damage), DC offset


DESIGNED AND Wichita, Kansas, USA

WARRANTY

MANUFACTURED

Two-year limited warranty

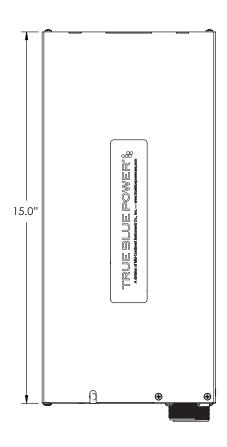

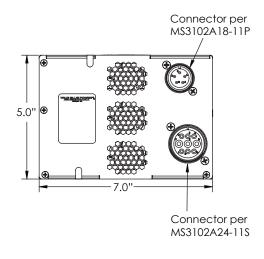

Technical specifications

INPUT VOLTAGE 115/200 VAC 360 – 800 Hz 3-phase

INPUT PHASE CURRENT 13 A

OUTPUT VOLTAGE
TFC4000 115 VAC, 60 Hz, single phase
TFC4002 230 VAC, 50 Hz, single phase

OUTPUT POWER 4,000 watts

WEIGHT 18.9 lbs (8.57 kg)

ALTITUDE 55,000 feet

TEMPERATURE $-40^{\circ}\text{F to } +167^{\circ}\text{F } (-40^{\circ}\text{C to } +75^{\circ}\text{C})$

MATING CONNECTOR 9019110-4, 9019507-2

CASE Anodized aluminum, blue

CERTIFICATION FAA PMA approved
FAA TSO-C230
RTCA DO-160G

TRUE BLUE POWER®

A division of Mid-Continent Instrument Co., Inc.